

2018

Beta

## 1947M Gun for single-component sealant

- Air gun for extruding and spraying single-component sealants, polymer and polyurethane cartridges, protective and soundproofing products
- Can be used with 310 ml plastic cartridges; pressure connection
- Supplied with extrusion nozzle kit, to make welds varying in geometry
- Atomization and amount of sprayed product can be easily adjusted, thereby obtaining more or less peeled surfaces and welds varying in width and depth



*Nozzles kit*



**Easy to adjust, easy to use**



2018

Beta

## 421/SP6 Assortments of cap screw counterbores

Set of 6 countersinks with guide pins, fine grade,  
made of **HSS**

- Designed to create a recess for socket head cap screws
- 6pcs (M3 –M4 – M5 – M6 – M8 – M10) fine grade
- For **through holes**
- For **iron and high-resistance steel**



2018

## 422 HSS center drills - 60° countersink steel

Beta

3 different bits Ø: 1,6 -2,5 – 3,15 mm



- Quick and safe drilling of centering holes
- Reduced chance of break
- Right cutter with 118° angle cut
- Used to drill steel and metal



For more information visit our website

2018

Beta

# CB52-O gearbox/transmission trolley with liquid recovery system

Inclined plane and drain holes  
allow liquids to be recovered in collection tank

Fitted with:

- 4 swivel castors, including 2 with brakes
- tool drawer
- pull-out liquid collection tank;  
capacity: 11 l
- 2 shelves

Dimensions: 1200x640x870 mm  
60 kg



2018

Beta

## 1464 FG Dummy regulators set

Kit of 8 dummy regulators to be used with Beta items 1464T-1464AP tester for a correct diagnosis of the Common Rail system.

Recommended for: Bosch, Delphi, Denso and Siemens pressure regulators



2018

Beta

## 1464 PB Low pressure diesel/petrol set

set of 9 connectors for testing fuel low pressure  
(for use with item 1464T)

Allow fuel low pressure in diesel and petrol engines to be  
quickly checked



2018

Beta

# 3065/20-10T air hydraulic jack, 20-10 t, with case

Portable and lightweight, ideal for road assistance operations

- Supplied with two extensions, 75 and 60 mm long


## TECHNICAL DATA

capacity: 20-10 t

weight: 23 kg

power supply pressure: 8-10 bar

air consumption: 400 nl/min

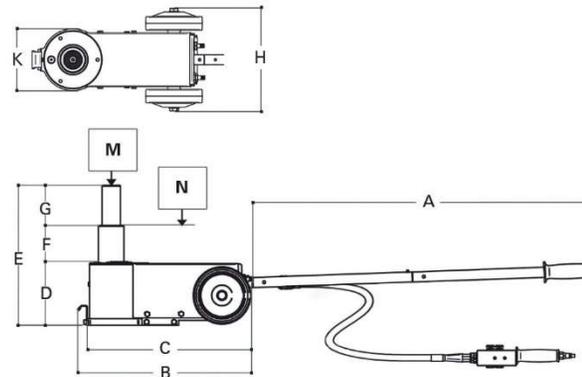

2018

Beta

## 3067/60-15T Air hydraulic jack, 60-30-15 t

With a minimum height of no more than 120 mm, it is particularly suitable for use on buses, coaches and public means of transport

Automatic piston return

- Two descent valves with under load speed control
- supplied with two extensions, 70 and 120 mm long


### TECHNICAL DATA

capacity: 60-30-15 t

weight: 56 kg

power supply pressure: 8-10 bar

air consumption: 600 l/min

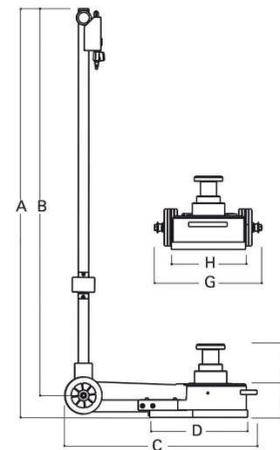

2018

Beta

# 1895 Ultrasonic cleaner 6-13-27 lt. / Range extension

1895 6

1895 13 range extension

1895 27 range extension

**Ultrasonic cleaning tank, 6, 13 and 27 Lt.**

**Quick Overview**

**Maximum capacity: 13 or 27 lt.**

**Ideal for injectors, EGR valves, ecc...**

With special degas function

- Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (injectors, carburetors, valves etc.)
- Digital display for temperature and cleaning time selection
- Two cleaning modes: "soft" and "normal"
- For normal cleaning, just use water at a temperature of 50-60 °C
- For more accurate cleaning, add non-foaming detergent solutions specific for ultrasonic tanks
- Using the degas mode speeds up air release throughout the tank, thereby improving ultrasonic cleaning efficiency.



2018

Beta

## 1438/K DSG Clutch removal set for VW group

- set of 13 tools to remove, install and adjust VW 6- and 7- gear DSG clutches
- Allows jobs on automatic and electronic dual clutch gearbox transmissions.

Includes pliers for removing/installing snap ring of main shaft and adjustment gauge for clutch system



For DSG clutches

6 gears (08D)

7 gears (0AM)

2018

Beta

# 1498TB/ 12-24 New Battery/alternator tester

- allows the following to be tested: battery, alternator (smart and normal) and starter, diode ripple and chassis test
- fitted with software for printing test from PC
- backlit display
- compact, shockproof frame
- 10 language software
- complete with input for connecting a removable mini printer (optional accessory, Beta 1498ST/TB)

1498ST/TB

Printer (optional)



## TECHNICAL DATA:

- applications: 12V battery test - Alternator charge test, 12-24V - Starter test
- operating range: 100-2000 CCA
- reference standards: CCA,SAE,DIN,EN,IEC,JIS
- supported batteries: PB, WET, GEL, AGM, AGM FLAT, EFB
- voltmeter: 9V-36V
- cable length: 1600 mm
- languages: Italian, English, French, German, Spanish, Polish, Romanian, Dutch, Swedish and Finnish
- accessories included: USB cable and software